


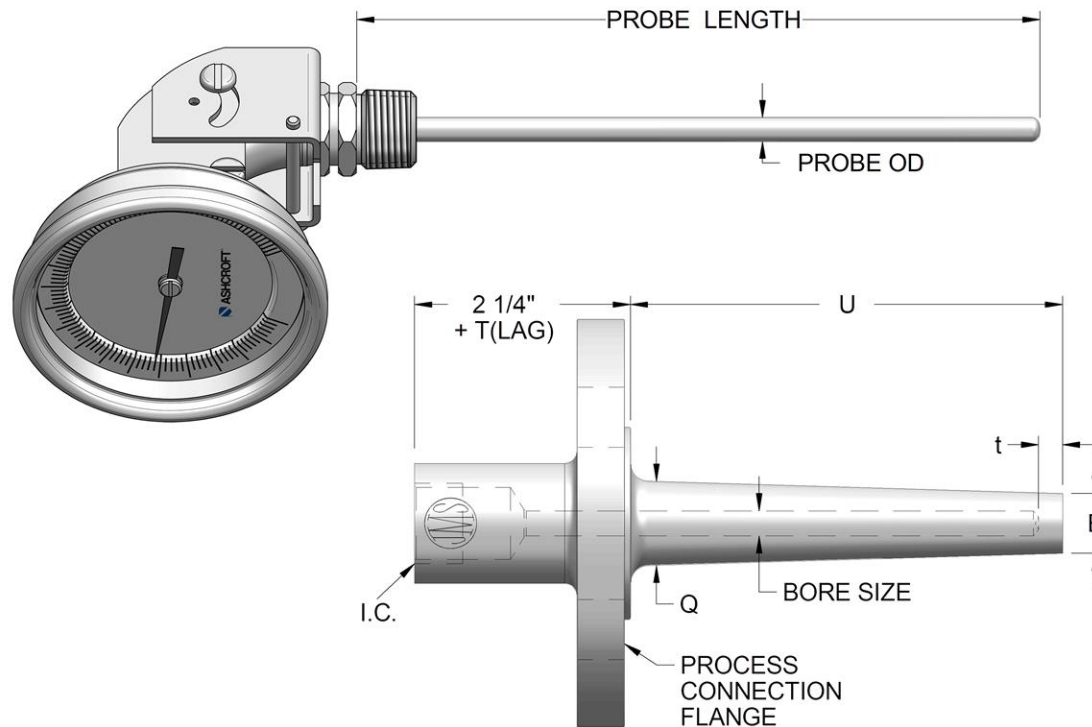

Thermowell						JMS SOUTHEAST INCORPORATED CERTIFIES THIS DRAWING IS IN ACCORDANCE WITH JMS SOUTHEAST INCORPORATED ENGINEERING SPECIFICATIONS AND ACCURATELY REPRESENTS THE EQUIPMENT FURNISHED. THIS DRAWING IS THE SOLE PROPERTY OF JMS SE, AND MUST BE RETURNED UPON DEMAND. IT MAY NOT BE REPRODUCED NOR THE INFORMATION CONTAINED THEREIN USED WITHOUT THE WRITTEN PERMISSION OF JMS SOUTHEAST INCORPORATED.			
Connection Type		Flanged; Plug/Chain: No		Material	316 SS				
Shank Style	Tapered	Bore Dia. (d)	0.26"	Instr. Conn. (I.C.)	1/2" NPT				
Insert. Depth (U)		9"	Lag Ext. (T)	None	Process Conn. Size	1-1/2"		Company Name: JMS	
Root OD (Q)		1-1/16"	Tip Thickness (t)	1/4"	Flange Only	1-1/2", 600, Raised, 316 SS, Full Pen Weld, NDE Weld Inspect.		Reference Data:	
Tip OD (B)		3/4"	Step Length (Ls)	N/A					
JMS Part #		5TX2NU9ZKF4D1KW; X: Tapered Shank, Q=1-1/16", B=3/4"				Drawing #:		Rev 0	
Note									
Bimetal Thermometer						Project Name:		TOLERANCE TABLE: PROBE (L): 0-48" ±1/8" 48"-144" ±1/4" 144"+ -1" / +2" WIRE (L): <24" -1/2" / +1" >24" -1/2" / +2" PROT. TUBE (P&U): ±1/4" FRACTIONAL DIM: ±1/8" DECIMAL DIM: ±0.10" .XX ±0.010" .XXX ±0.010" .XXXX ±0.005" UNLESS STATED OTHERWISE	
Brand		Ashcroft							
Dial		Style: EveryAngle (Std); Size: 5"; Options: Safety Glass				Generated By		JMS SOUTHEAST, INC. Temperature Measurement 105 Temperature Lane Statesville, North Carolina 28677 Phone: (704) 873-1835 Fax: (704) 878-6166 www.jms-se.com Email: sensors@jms-se.com	
Construction		Connection Style: Fixed; Stem Length: 11"							
Temp Units		°F; Range: 0/200				Date		Initials	
Part #		9A50EI60E11XSGNH0/200F							
Note						01/14/26		CB	