


Tag Numbers
2104-TH-153

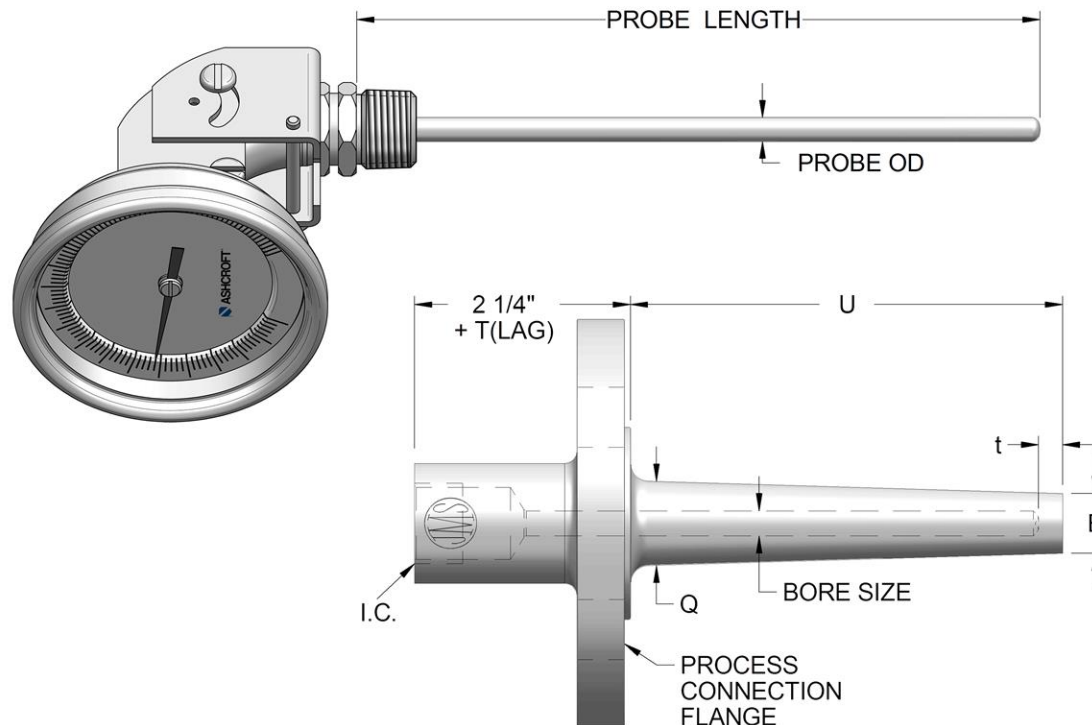

Thermowell					
Connection Type	Flanged; Plug/Chain: No			Material	316 SS
Shank Style	Tapered	Bore Dia. (d)	0.26"	Instr. Conn. (I.C.)	1/2" NPT
Insert. Depth (U)	9"	Lag Ext. (T)	None	Process Conn. Size	1-1/2"
Root OD (Q)	1-1/16"	Tip Thickness (t)	1/4"	Flange Only	1-1/2", 600, Raised, 316 SS, Full Pen Weld, NDE Weld Inspect.
Tip OD (B)	3/4"	Step Length (Ls)	N/A		
JMS Part #	5TX2NU9ZKF4D1KW; X: Tapered Shank, Q=1-1/16", B=3/4"				
Note					
Bimetal Thermometer					
Brand	Ashcroft				
Dial	Style: EveryAngle (Std); Size: 5"; Options: Safety Glass				
Construction	Connection Style: Fixed; Stem Length: 11"; Material: 316 SS				
Temp Units	°F; Range: 0/200				
Part #	9A50EI60E11XSGYWNH0/200F				
Note					

JMS SOUTHEAST INCORPORATED CERTIFIES THIS DRAWING IS IN ACCORDANCE WITH JMS SOUTHEAST INCORPORATED ENGINEERING SPECIFICATIONS AND ACCURATELY REPRESENTS THE EQUIPMENT FURNISHED. THIS DRAWING IS THE SOLE PROPERTY OF JMS SE, AND MUST BE RETURNED UPON DEMAND. IT MAY NOT BE REPRODUCED NOR THE INFORMATION CONTAINED THEREIN USED WITHOUT THE WRITTEN PERMISSION OF JMS SOUTHEAST INCORPORATED.

Company Name:		JMS	
Reference Data:		Drawing #:	
		Rev 0	
Project Name:		TOLERANCE TABLE:	
		PROBE (L): 0-48" ±1/8" 48"-144" ±1/4" 144" + WIRE (L): <24" -1/2" / +1" >24" -1/2" / +2" PROT. TUBE (P&U): ±1/4" FRACTIONAL DIM: ±1/8" DECIMAL DIM: ±0.10" .XX ±0.010" .XXX ±0.010" .XXXX ±0.005" UNLESS STATED OTHERWISE	
Generated By		 JMS SOUTHEAST, INC. Temperature Measurement 105 Temperature Lane Statesville, North Carolina 28677 Phone: (704) 873-1835 Fax: (704) 878-6166 www.jms-se.com Email: sensors@jms-se.com	
Date	Initials		
01/14/26	CB		
		Not to Scale	Rev. 10-01-2015