


Tag Numbers
2104-TH-153

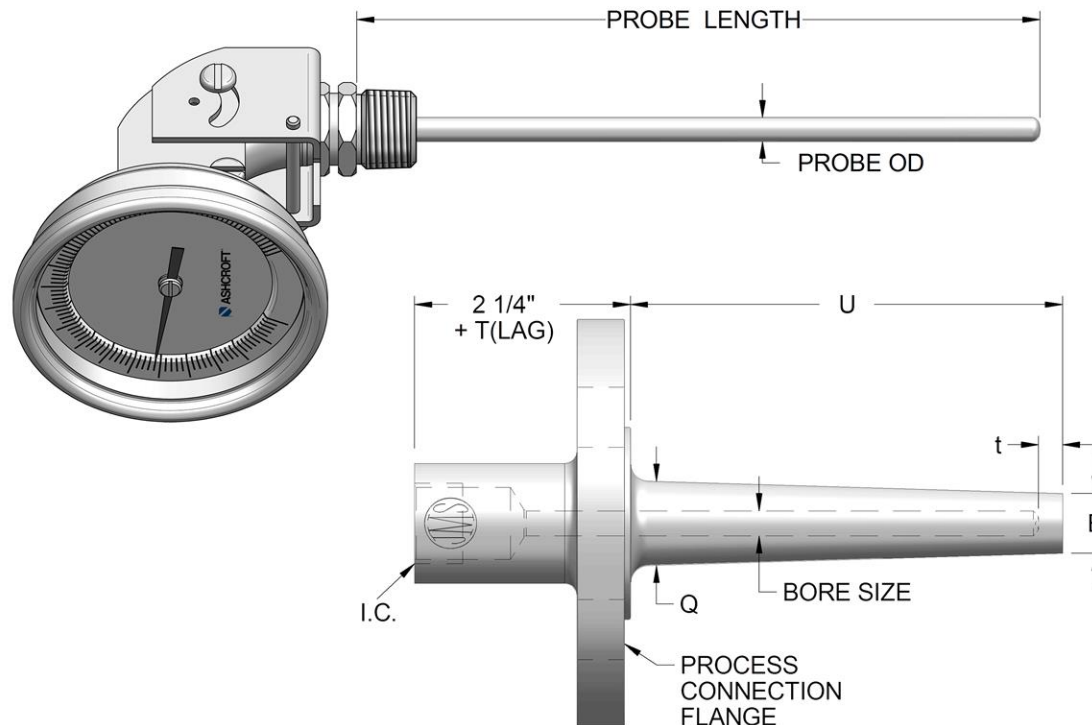

Thermowell						JMS SOUTHEAST INCORPORATED CERTIFIES THIS DRAWING IS IN ACCORDANCE WITH JMS SOUTHEAST INCORPORATED ENGINEERING SPECIFICATIONS AND ACCURATELY REPRESENTS THE EQUIPMENT FURNISHED. THIS DRAWING IS THE SOLE PROPERTY OF JMS SE, AND MUST BE RETURNED UPON DEMAND. IT MAY NOT BE REPRODUCED NOR THE INFORMATION CONTAINED THEREIN USED WITHOUT THE WRITTEN PERMISSION OF JMS SOUTHEAST INCORPORATED.			
Connection Type		Flanged; Plug/Chain: No		Material	316 SS				
Shank Style	Tapered	Bore Dia. (d)	0.26"	Instr. Conn. (I.C.)	1/2" NPT				
Insert. Depth (U)	9"	Lag Ext. (T)	None	Process Conn. Size	1-1/2"				
Root OD (Q)	1-1/16"	Tip Thickness (t)	1/4"	Flange Only	1-1/2", 600, Raised, 316 SS, Full Pen Weld, NDE Weld Inspect.				
Tip OD (B)	3/4"	Step Length (Ls)	N/A						
JMS Part #	5TX2NU9ZKF4D1KW; X: Tapered Shank, Q=1-1/16", B=3/4"					Reference Data:		Drawing #:	
Note	WELL INCLUDES,DRAWING,WFC,UT, EHT 1100PSI, DYE PEN, PMI, MTR								
Bimetal Thermometer						PO 4900757774		Rev 0	
Brand	Ashcroft								
Dial	Style: EveryAngle (Std); Size: 5"; Options: Safety Glass					Project Name:		TOLERANCE TABLE: PROBE (L): 0-48" ±1/8" 48"-144" ±1/4" 144" + -1" / +2" WIRE (L): <24" -1/2" / +1" >24" -1/2" / +2" PROT. TUBE (P&U): ±1/4" FRACTIONAL DIM: ±1/8" DECIMAL DIM: ±0.10" XXX ±0.010" XXXX ±0.005" UNLESS STATED OTHERWISE  JMS SOUTHEAST, INC. Temperature Measurement 105 Temperature Lane Statesville, North Carolina 28677 Phone: (704) 873-1835 Fax: (704) 878-6166 www.jms-se.com Email: sensors@jms-se.com	
Construction	Connection Style: Fixed; Stem Length: 11"; Material: 316 SS								
Temp Units	°F; Range: 0/200					Generated By		Not to Scale	
Part #	9A50EI60E11XSGYWNH0/200F								
Note						Date	Initials	Rev. 10-01-2015	
						01/14/26	CB		