


Tag Numbers
Thermowells:
7ECB-TW-7003
7ECB-TW-7006
7ECB-TW-7008
7ECB-TW-7013
8ECB-TW-8003
8ECB-TW-8006
8ECB-TW-8008
8ECB-TW-8013

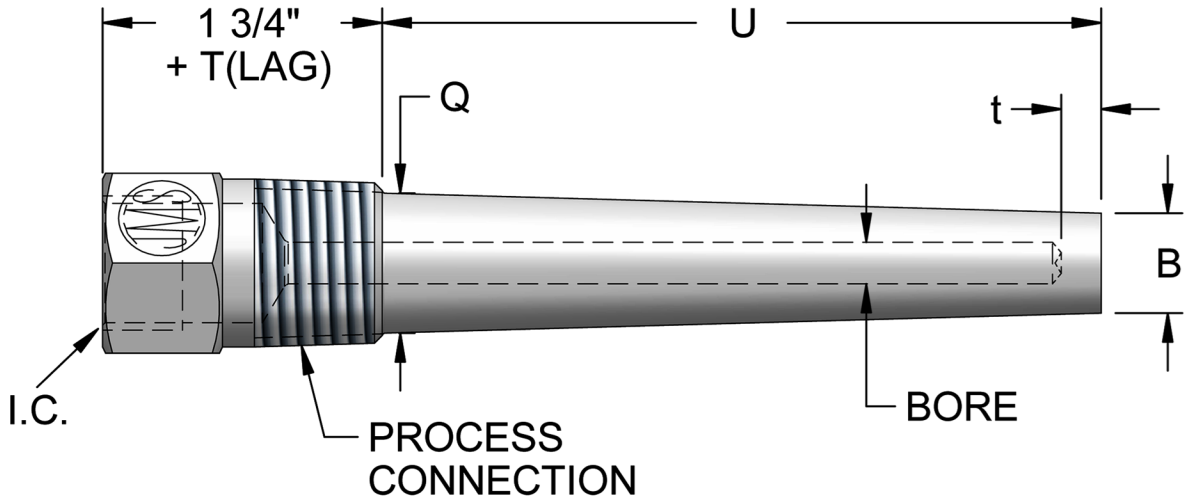

JMS SOUTHEAST INCORPORATED CERTIFIES THIS DRAWING IS IN ACCORDANCE WITH JMS SOUTHEAST INCORPORATED ENGINEERING SPECIFICATIONS AND ACCURATELY REPRESENTS THE EQUIPMENT FURNISHED. THIS DRAWING IS THE SOLE PROPERTY OF JMS SE, AND MUST BE RETURNED UPON DEMAND. IT MAY NOT BE REPRODUCED NOR THE INFORMATION CONTAINED THEREIN USED WITHOUT THE WRITTEN PERMISSION OF JMS SOUTHEAST INCORPORATED

Company Name:
MEAD OBRIEN

Reference Data:	Drawing #: QD9210	Rev 0
-----------------	----------------------	-------

Project Name: Fort St. Vrain	TOLERANCE TABLE: PROBE (L): 0-48" ±1/8" 48"-144" ±1/4" 144" + -1"/+2" WIRE (L): <24" -1/2"/+1" >24" -1/2"/+2" PROT. TUBE (P&U): ±1/4" FRACTIONAL DIM: ±1/8" DECIMAL DIM: ±0.10" XXX ±0.010" XXXX ±0.005" UNLESS STATED OTHERWISE	 JMS SOUTHEAST, INC. Temperature Measurement 105 Temperature Lane Statesville, North Carolina 28677 Phone: (704) 873-1835 Fax: (704) 878-6166 www.jms-se.com Email: sensors@jms-se.com
Generated By		
Date: 02/13/26	Initials:	

Thermowell					
Connection Type	Threaded; Plug/Chain: No			Material	Carbon Steel A105
Shank Style	Tapered	Bore Dia. (d)	0.26"	Sensor Conn. (IC)	1/2" NPT
Stem Length (U)	5-1/4"	Lag Extension (T)	None	Process Conn. Size	1" NPT
Root (Q)	1-1/16"	Tip Thickness (t)	1/4"		
Tip OD (B)	0.781"	Step Length (Ls)	N/A		
Tagging	Stamped On Well (Std)				
JMS Part #	53XT2NU5.25ZG1; X: Tapered Shank, Q=1.0625", B=0.781"				

Not to Scale