


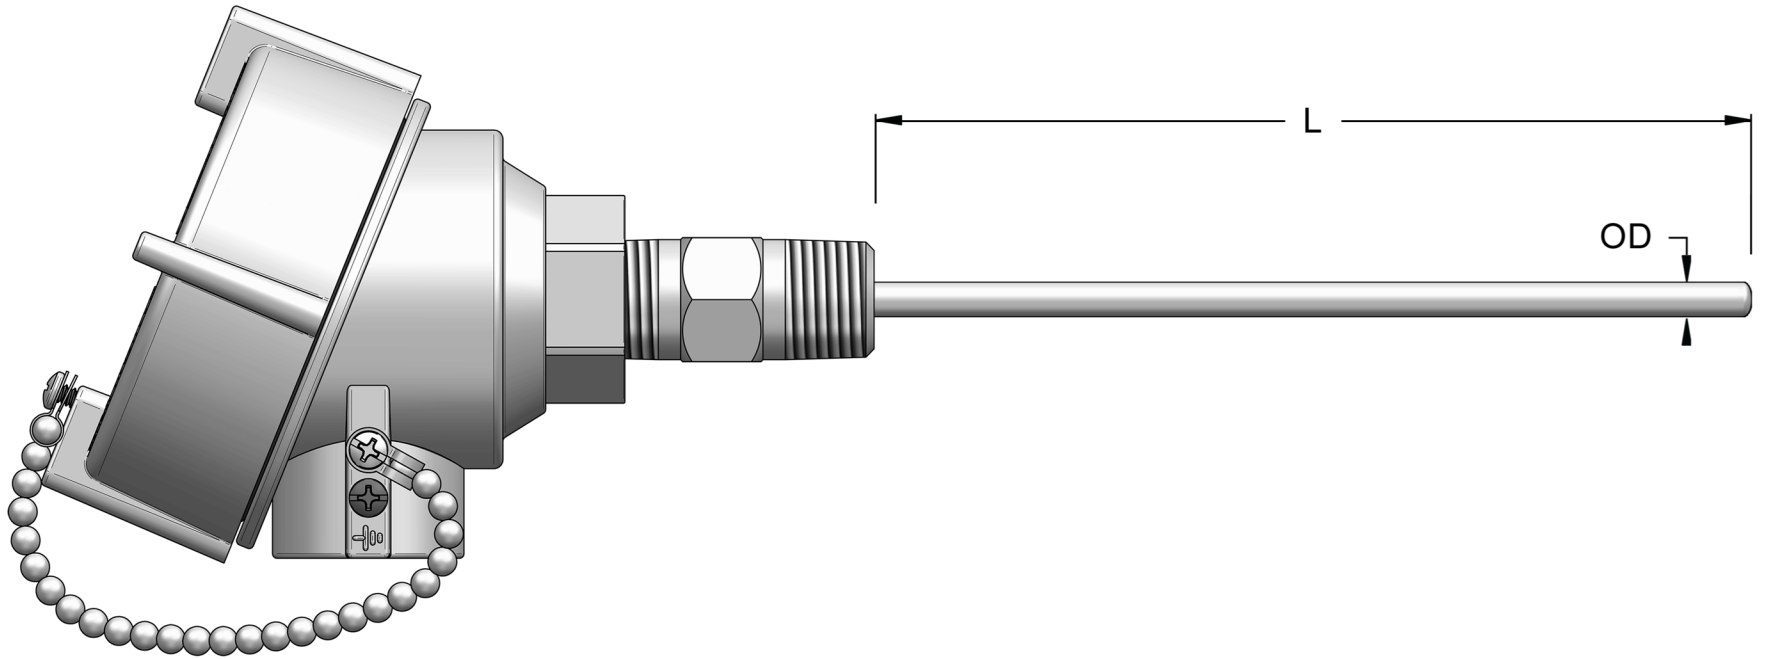

JMS SOUTHEAST INCORPORATED CERTIFIES THIS DRAWING IS IN ACCORDANCE WITH JMS SOUTHEAST INCORPORATED ENGINEERING SPECIFICATIONS AND ACCURATELY REPRESENTS THE EQUIPMENT FURNISHED. THIS DRAWING IS THE SOLE PROPERTY OF JMS SE, AND MUST BE RETURNED UPON DEMAND. IT MAY NOT BE REPRODUCED NOR THE INFORMATION CONTAINED THEREIN USED WITHOUT THE WRITTEN PERMISSION OF JMS SOUTHEAST INCORPORATED

Company Name:
MIDMAC INTERNATIONAL LLC

Reference Data:

Drawing #:

QD9216

Rev 0

Sensor

Sensor	Type K Thermocouple, Single Element, Standard Limits [ASTM E230-11], Max Temp: > 660°C (1220°F)
Construction	Stabaloy, MgO Swaged, 1/4" OD, 9.85" L, Ungrounded
Attaching Device	Double Threaded SS Spring-Loaded Fitting, 1/2" NPTM
Cold-End	Head: Explosion Proof, Aluminum, Screw Cap & Chain, NEMA 4X, 1/2" x 3/4" Conduit Conn.
JMS Part #	1K1BVU9.85"SPZZI

Project Name:

TOLERANCE TABLE:
 PROBE (L): 0-48" ±1/8"
 48"-144" ±1/4"
 144" + -1"/+2"
 WIRE (L): <24" -1/2"/+1"
 >24" -1/2"/+2"
 PROT. TUBE (P&U): ±1/4"
 FRACTIONAL DIM: ±1/8"
 DECIMAL DIM: ±0.10"
 XXX ±0.010"
 XXXX ±0.005"
 UNLESS STATED OTHERWISE

Generated By

Date

Initials

02/16/26



JMS SOUTHEAST, INC.
 Temperature Measurement
 105 Temperature Lane
 Statesville, North Carolina 28677
 Phone: (704) 873-1835
 Fax: (704) 878-6166
 www.jms-se.com
 Email: sensors@jms-se.com

Not to Scale

Rev. 10-01-2015