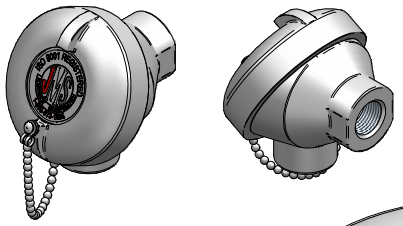

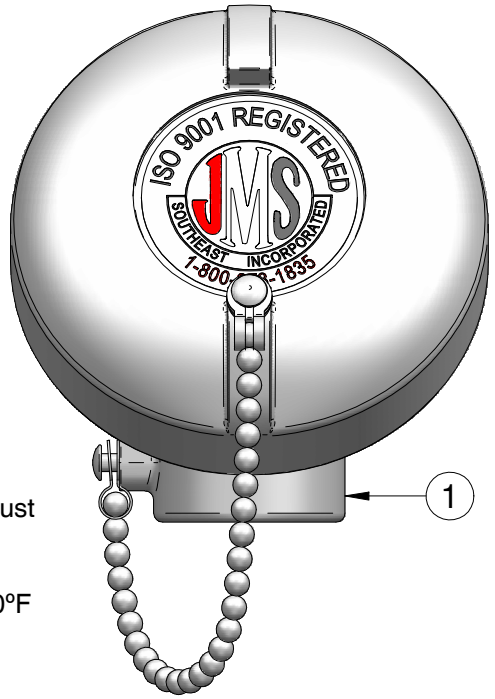


Corrosion resistant
Moisture resistant Dust resistant Durable
NEMA 4
Max temp rating 500ºF

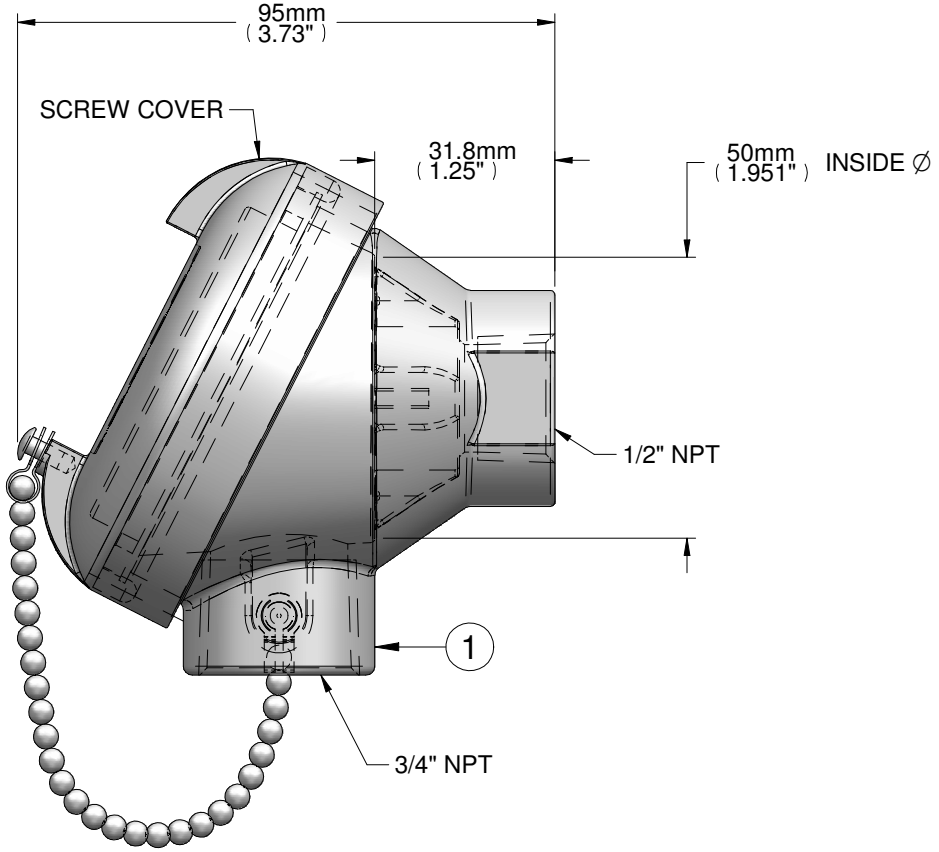


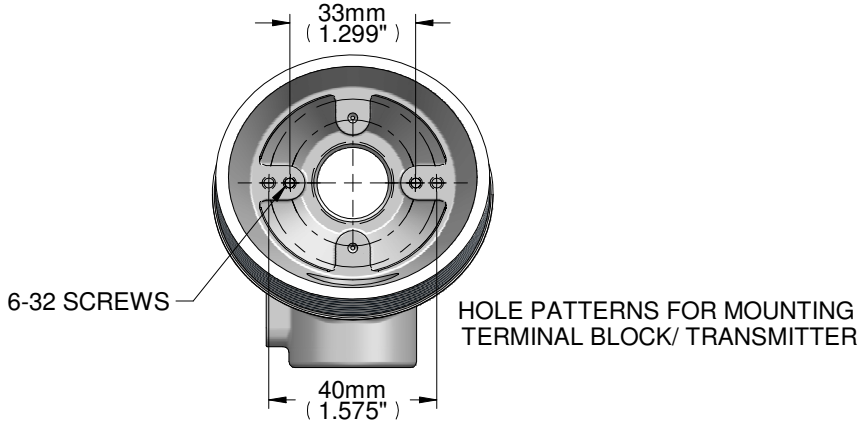


**JMS PART #**
**6M**

JMS SOUTHEAST INCORPORATED CERTIFIES THIS DRAWING IS IN ACCORDANCE WITH JMS SOUTHEAST INCORPORATED ENGINEERING SPECIFICATIONS AND ACCURATELY REPRESENTS THE EQUIPMENT FURNISHED. THIS DRAWING IS THE SOLE PROPERTY OF JMS SE, AND MUST BE RETURNED UPON DEMAND IT MAY NOT BE REPRODUCED NOR THE INFORMATION CONTAINED THEREIN USED WITHOUT THE WRITTEN PERMISSION OF JMS SOUTHEAST INCORPORATED

Company Name:
**JMS-SE HEADS**

Reference Data:

Drawing #:

| DESCRIPTION | |
|---|---|
| 1 | HEAD, GENERAL PURPOSE, POLISHED ALUMINUM, SCREW COVERED CAP & CHAIN, 1/2" X 3/4" FNPT, SILICONE GASKET, WEATHER TIGHT SEAL, NEMA 4 |

TOLERANCE TABLE:

| | |
|---|---|
| PROBE (L): 0-48" | ±1/8" |
| 48"-144" | ±1/4" |
| 144" + | -1"/+2" |
| WIRE (L): <24" | -1/2"/+1" |
| >24" | -1/2"/+2" |
| PROT. TUBE (P&U): | ±1/4" |
| FRACTIONAL DIM: | ±1/8" |
| DECIMAL DIM: | |
| X.X | ± 0.10" |
| X.XX | ± 0.010" |
| X.XXX | ± 0.005" |

UNLESS STATED OTHERWISE

| Approvals | Initials | Date |
|---|---|---|
| Drafting | | |
| Engineering | | |
| Second | | |

**JMS SOUTHEAST, INC.**
Temperature Measurement
105 Temperature Lane
Statesville, North Carolina 28677
Phone: (704) 873-1835
Fax: (704) 878-6166
www.jms-se.com
Email: sensors@jms-se.com

REV. 4-10-2009 •