


# RESISTANCE TEMPERATURE DETECTORS

## JMS TYPE "S" ("S" Stands for SUPER!)

- Meets DIN 43760, I.E.C. 751 .00385 ohms/ohms/°C, to 1/10 design tolerance at initial resistor calibration
- Not available in dual element swaged
- Tip sensitivity = 1 Ø + 1/2" (See page 3-8)
- Probe can be manufactured as a 3/32", 1/8", 1/4" or larger tube

SECTION 3

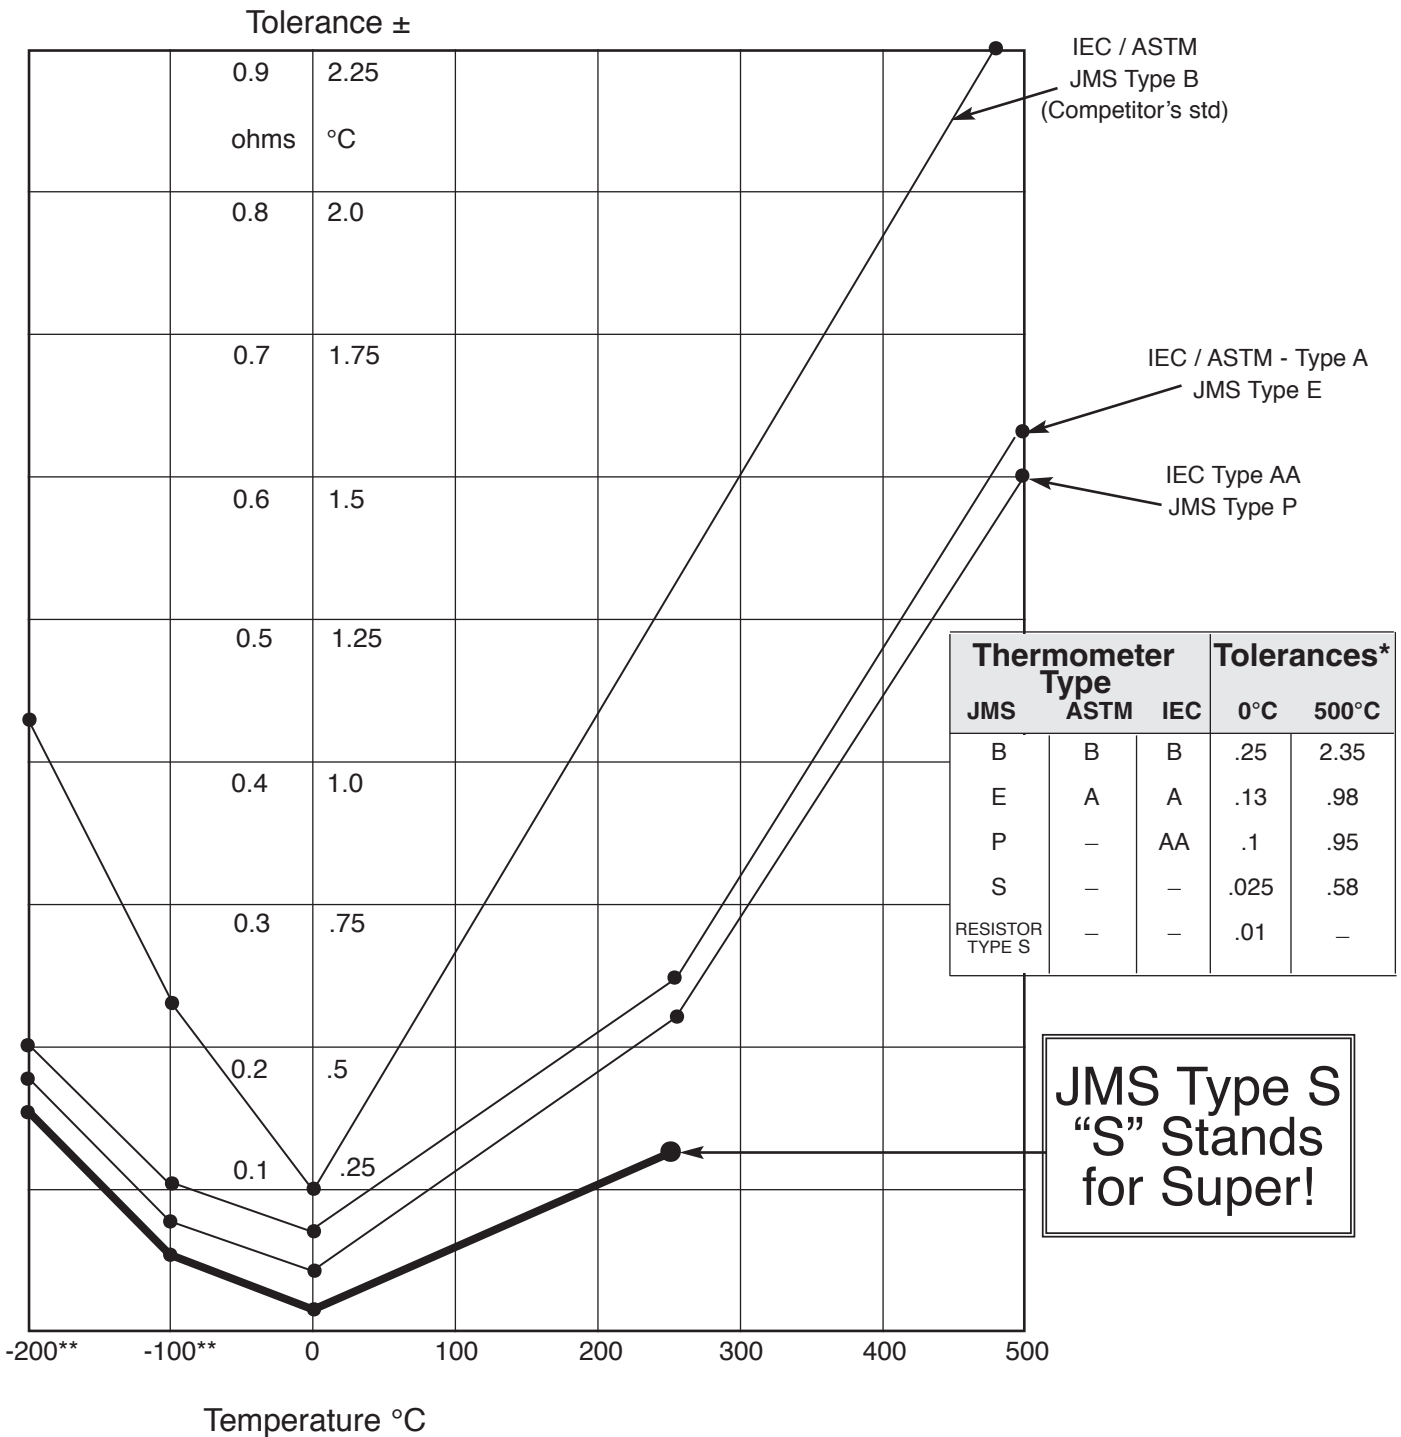

\* Initial Calibration Accuracy  
\*\* Negative tolerances extrapolated from ASTM E1137