


RESISTANCE TEMPERATURE DETECTORS

JMS TYPE "S" ("S" Stands for SUPER!)

- Meets DIN 43760, I.E.C. 751 .00385 ohms/ohms/°C, to 1/10 design tolerance at initial resistor calibration
- Not available in dual element swaged
- Tip sensitivity = $1 \text{ } \emptyset + 1/2$ " (See page 3-8)
- Probe can be manufactured as a 3/32", 1/8", 1/4" or larger tube

SECTION 3

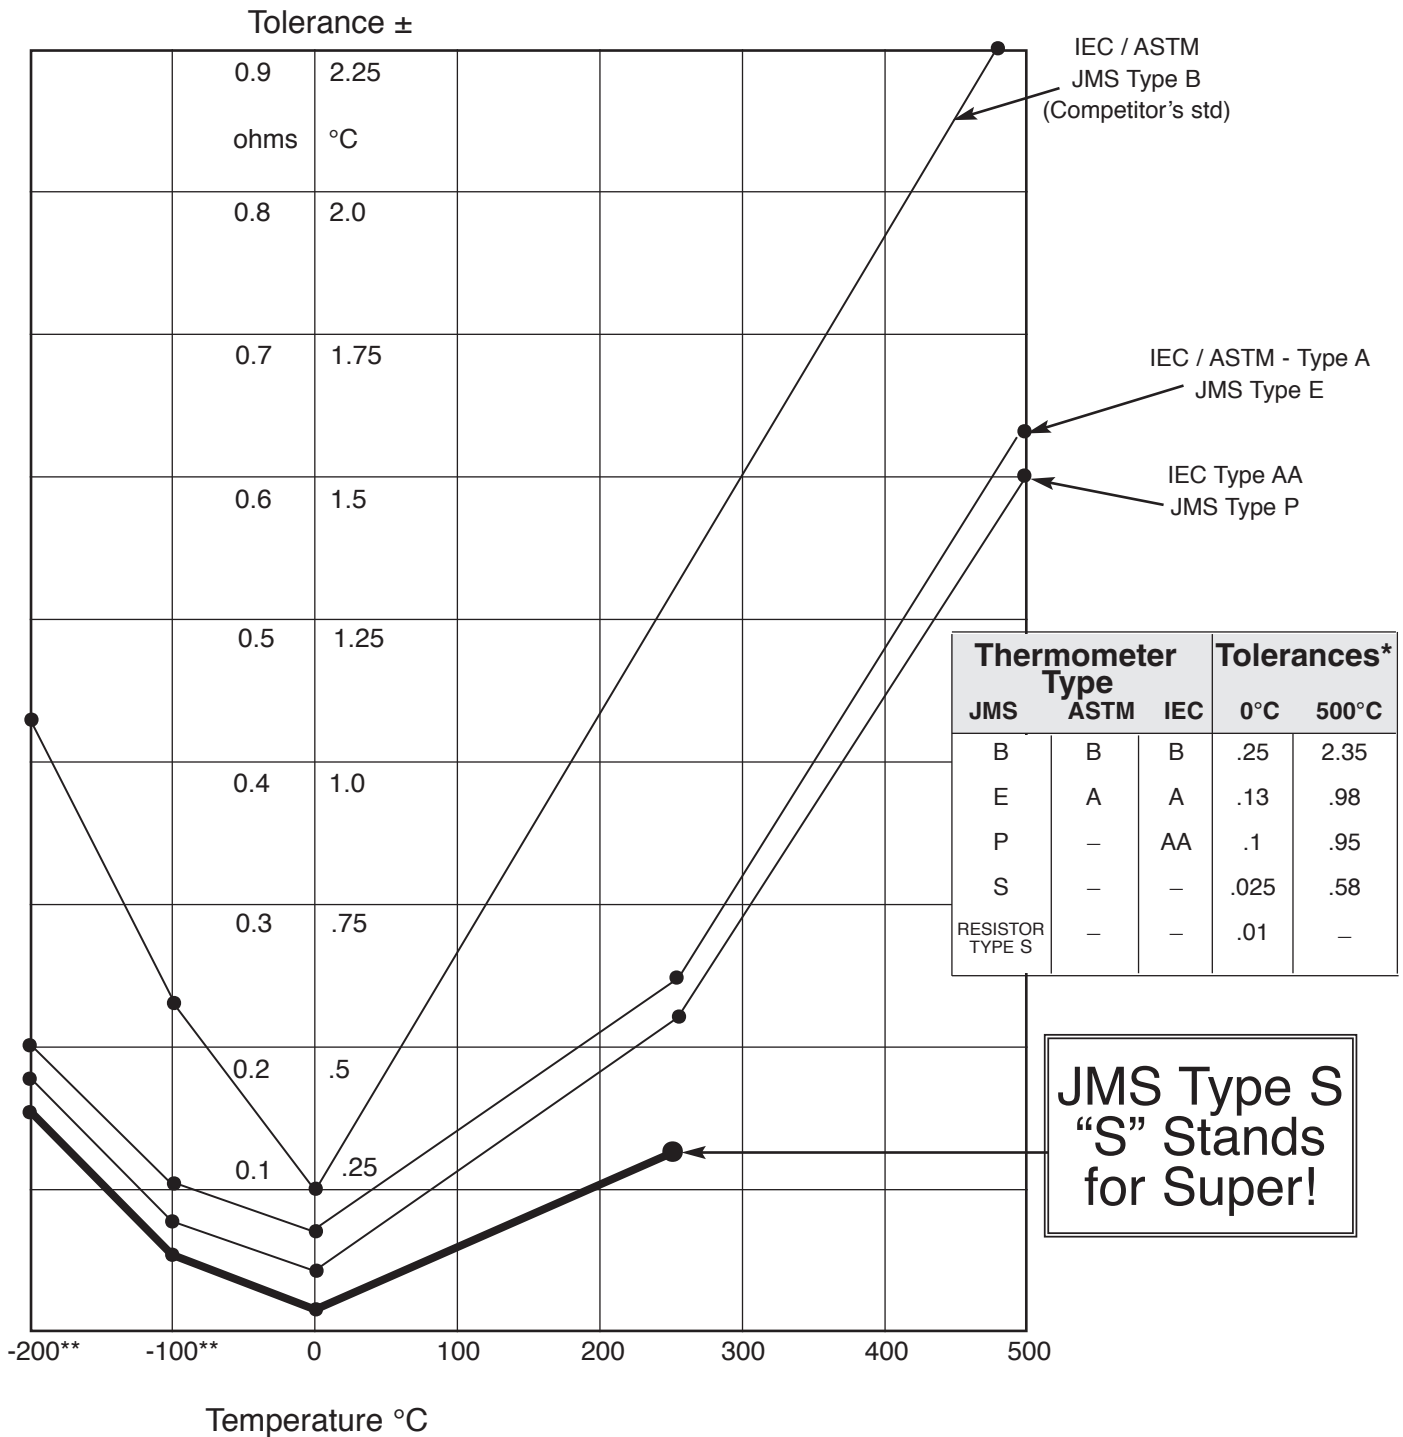

* Initial Calibration Accuracy
 ** Negative tolerances extrapolated from ASTM E1137