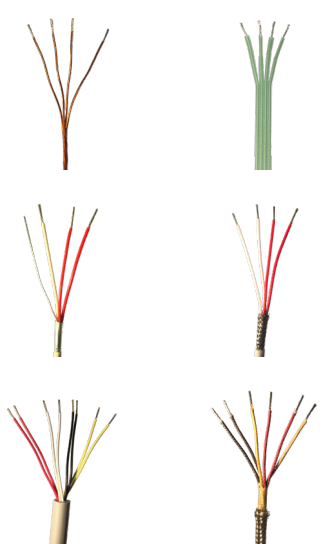




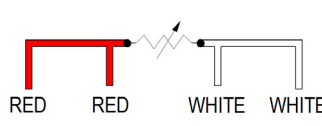
RTD WIRE

#1	DESCRIPTION				
7R	RTD wire				
	#2	INSULATION *Conductors are color coded per ASTM E1137 & IEC 60751			
	PP	Polyvinyl Chloride(PVC)			
	GG	Fiberglass braid			
	GS	Fiberglass braid with stainless steel overbraid (available in 3, 4 or 6 conductor, 24 AWG)			
	KK	Kapton insulated			
	TT*	Extruded Teflon singles, Teflon wrap overall (Standard)			
	TS*	Extruded Teflon singles, Teflon wrap overall, with stainless steel overbraid			
	X	Other, specify			
	#3	NUMBER OF CONDUCTORS			Special color coding available by request.
	2	Two conductors			
	3	Three conductors			
	4	Four conductors			
	X	Other, specify			
	#4	WIRE SIZE			
	16	16 AWG			
	20	20 AWG			
	24	24 AWG (Standard)			
	28	28 AWG			
	30	30 AWG			
	X	Other, specify			
	#5	WIRE CONSTRUCTION			
	1	Solid			
	2	Stranded (Standard)			
	#6	SHIELD			
	N	No shield/not applicable			
	A	Aluminum Mylar shield and drain			

7R	TT	3	24	2	N
----	----	---	----	---	---



RTD WIRING CONFIGURATION AND COLOR CODE
(Reference ASTM 1137 and IEC 60751)

	2-wire-configuration	3-wire-configuration	4-wire-configuration
One resistor			
Two resistor	