



# RUBBER COMPOUND MIXING SENSORS

## TYPICAL DESIGNS


OPTION A — F270 MIXER TYPICAL

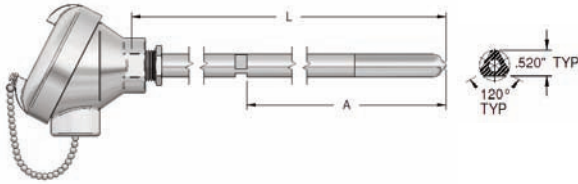


OPTION B & C — F270, F620 TYPICAL FOR OPTION B

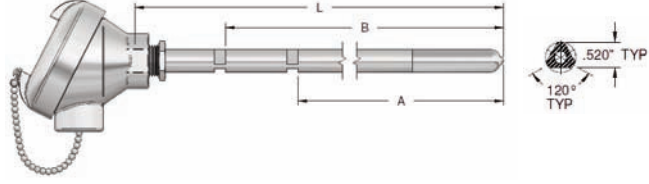

OPTION D — 3 NOTCH SQUARE CUT

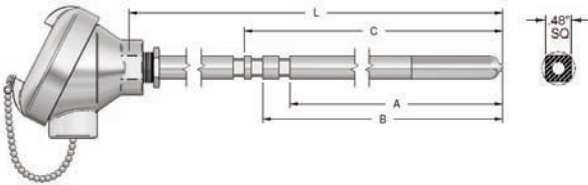

OPTION N — F370, F620 TYPICAL

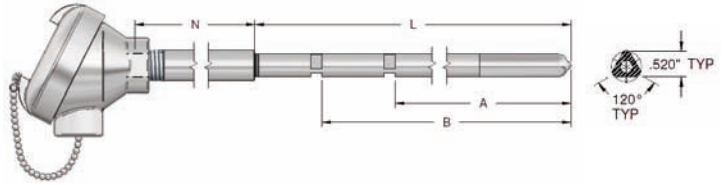

#1	DESCRIPTION																																																	
4R	Temperature sensors for compound mixing applications																																																	
#2	SENSOR EXTERNAL CONFIGURATION (see above drawings)																																																	
	<table border="1"> <thead> <tr> <th>Description</th> <th>Mixer Models*</th> <th>L</th> <th>A</th> <th>B</th> <th>C</th> <th>N</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>1 notch (triangular) F270</td> <td>12"</td> <td>10 7/32"</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>N</td> <td>2 notch (triangular) F370, F620</td> <td>17 5/8"</td> <td>13 31/32"</td> <td>15 31/32"</td> <td>—</td> <td>5"</td> </tr> <tr> <td>B</td> <td>2 notch (triangular) F270, F620</td> <td>18"</td> <td>13 31/32"</td> <td>15 31/32"</td> <td>—</td> <td>—</td> </tr> <tr> <td>C</td> <td>2 notch (triangular)</td> <td>18"</td> <td>13 15/32"</td> <td>15 15/32"</td> <td>—</td> <td>—</td> </tr> <tr> <td>D</td> <td>3 notch (square) 11D, F80, 9D, 3D</td> <td>13"</td> <td>9 1/16"</td> <td>9 13/16"</td> <td>10 5/16"</td> <td>—</td> </tr> <tr> <td>X</td> <td>Other, specify</td> <td colspan="5"><i>*Usage typical. Applications may vary by machine.</i></td> </tr> </tbody> </table>	Description	Mixer Models*	L	A	B	C	N	A	1 notch (triangular) F270	12"	10 7/32"	—	—	—	N	2 notch (triangular) F370, F620	17 5/8"	13 31/32"	15 31/32"	—	5"	B	2 notch (triangular) F270, F620	18"	13 31/32"	15 31/32"	—	—	C	2 notch (triangular)	18"	13 15/32"	15 15/32"	—	—	D	3 notch (square) 11D, F80, 9D, 3D	13"	9 1/16"	9 13/16"	10 5/16"	—	X	Other, specify	<i>*Usage typical. Applications may vary by machine.</i>				
Description	Mixer Models*	L	A	B	C	N																																												
A	1 notch (triangular) F270	12"	10 7/32"	—	—	—																																												
N	2 notch (triangular) F370, F620	17 5/8"	13 31/32"	15 31/32"	—	5"																																												
B	2 notch (triangular) F270, F620	18"	13 31/32"	15 31/32"	—	—																																												
C	2 notch (triangular)	18"	13 15/32"	15 15/32"	—	—																																												
D	3 notch (square) 11D, F80, 9D, 3D	13"	9 1/16"	9 13/16"	10 5/16"	—																																												
X	Other, specify	<i>*Usage typical. Applications may vary by machine.</i>																																																
#3	TIP TYPE																																																	
	<table border="1"> <tbody> <tr> <td>1</td> <td>Heavy Duty 316 SS</td> </tr> <tr> <td>2</td> <td>Chrome Plating over Heavy Duty 316 SS</td> </tr> <tr> <td>3</td> <td>JMS Tough Tip</td> </tr> <tr> <td>X</td> <td>Other, specify.</td> </tr> </tbody> </table>	1	Heavy Duty 316 SS	2	Chrome Plating over Heavy Duty 316 SS	3	JMS Tough Tip	X	Other, specify.																																									
1	Heavy Duty 316 SS																																																	
2	Chrome Plating over Heavy Duty 316 SS																																																	
3	JMS Tough Tip																																																	
X	Other, specify.																																																	
#4	SENSOR TYPE — ADD "2" FOR DUAL ELEMENT, "3" FOR TRIPLE (ex: J2 = dual element type J)																																																	
	<table border="1"> <tbody> <tr> <td>J</td> <td>Type J Thermocouple</td> </tr> <tr> <td>R</td> <td>RTD — 100 ohm platinum</td> </tr> <tr> <td>X</td> <td>Other, specify</td> </tr> </tbody> </table> <p style="text-align: right;"><b>Note:</b> Grounded thermocouple junction is standard.</p>	J	Type J Thermocouple	R	RTD — 100 ohm platinum	X	Other, specify																																											
J	Type J Thermocouple																																																	
R	RTD — 100 ohm platinum																																																	
X	Other, specify																																																	
#5	COLD END TERMINATION [Add'l options see Pg 1-6]																																																	
	<table border="1"> <tbody> <tr> <td>M</td> <td>Aluminum screw top head with chain</td> </tr> <tr> <td>A6</td> <td>Bare ends — 6" leads</td> </tr> <tr> <td>A36</td> <td>Bare ends — 36" leads</td> </tr> <tr> <td>X</td> <td>Other, specify.</td> </tr> </tbody> </table>	M	Aluminum screw top head with chain	A6	Bare ends — 6" leads	A36	Bare ends — 36" leads	X	Other, specify.																																									
M	Aluminum screw top head with chain																																																	
A6	Bare ends — 6" leads																																																	
A36	Bare ends — 36" leads																																																	
X	Other, specify.																																																	
	<table border="1"> <tbody> <tr> <td>4S</td> <td>A</td> <td>3</td> <td>J</td> <td>M</td> </tr> </tbody> </table>	4S	A	3	J	M																																												
4S	A	3	J	M																																														