


THERMOCOUPLE TEMPERATURE LIMITS

	Material	Couple Condition	AWG					
			8	14	16	20	24	30
S R	Platinum and Platinum-Rhodium	Bare	-	-	-	-	-	-
		Protected	-	-	-	2800 F	2700 F	2400 F
T	Copper and Constantan	Bare	-	600°F	500°F	400°F	400°F	400°F
		Protected	-	700°F	600°F	500°F	400°F	400°F
J	Iron and Constantan	Bare	1200°F	900°F	900°F	800°F	650°F	600°F
		Protected	1400°F	1100°F	1100°F	900°F	700°F	700°F
K	Chromel and Alumel	Bare	2000°F	1700°F	1700°F	1600°F	1400°F	1300°F
		Protected	2300°F	2000°F	2000°F	1800°F	1600°F	1500°F
E	Chromel and Constantan	Bare	1400°F	1100°F	1100°F	900°F	700°F	700°F
		Protected	1600°F	1200°F	1200°F	1000°F	800°F	800°F

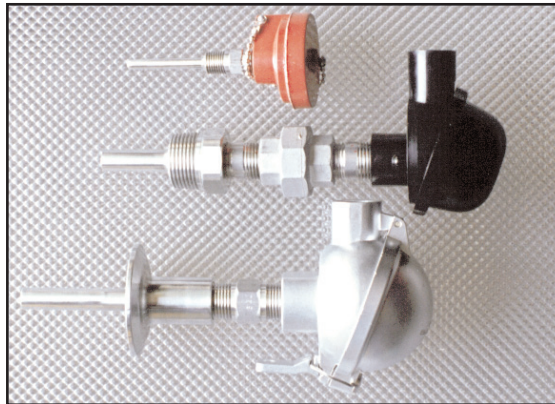

To print, right click or press ctrl + P